

FLEXLIGHT

MODEL NUMBER

In the solar business today, system purchases are made on a dollar-per-watt or Euro-per-watt basis. But, the return on investment (ROI) or payback period is determined by the amount of electricity, in kWh, the system produces. Third party testing, in real world conditions, shows that FlexLight® produces more energy for your purchased watt, and, therefore, provides the best return on investment. This third party testing, conducted over a number of years, shows the long-term reliability and performance of the FlexLight® product. This type of proof is something no other flexible thin-film manufacturer can provide.


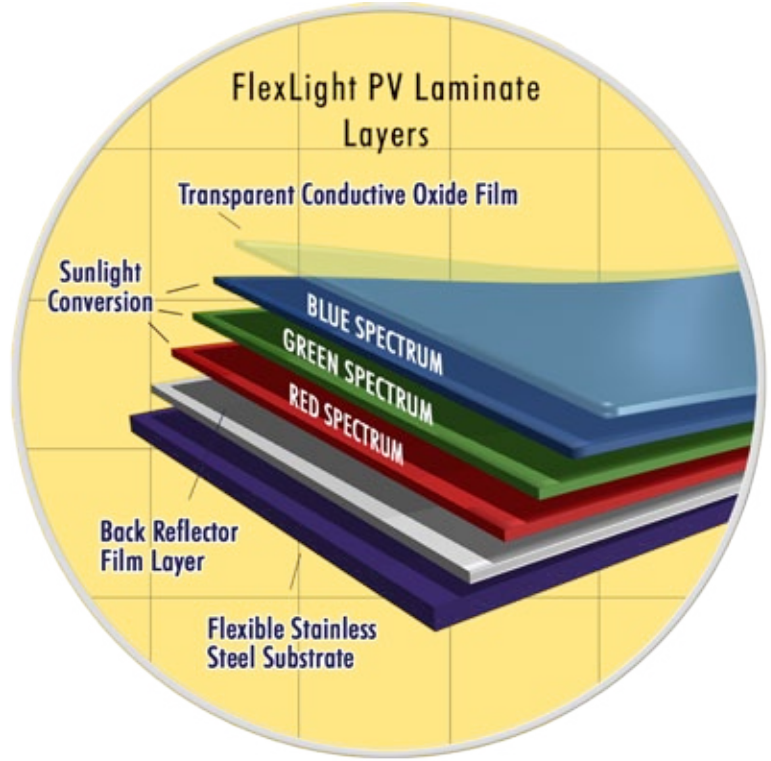


Figure 1. Triple-Junction Technology

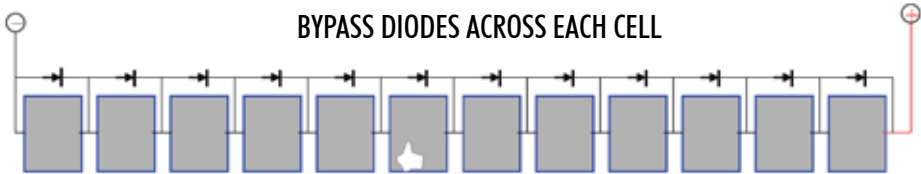

FLEXLIGHT PV MODULE CELL CONNECTIONS

Shade/Soil any one cell = Output loss of <4.5% (22-cell Laminate)
 Area of shade/soiling required to cover one cell = 9"x 14" (126 sq in)


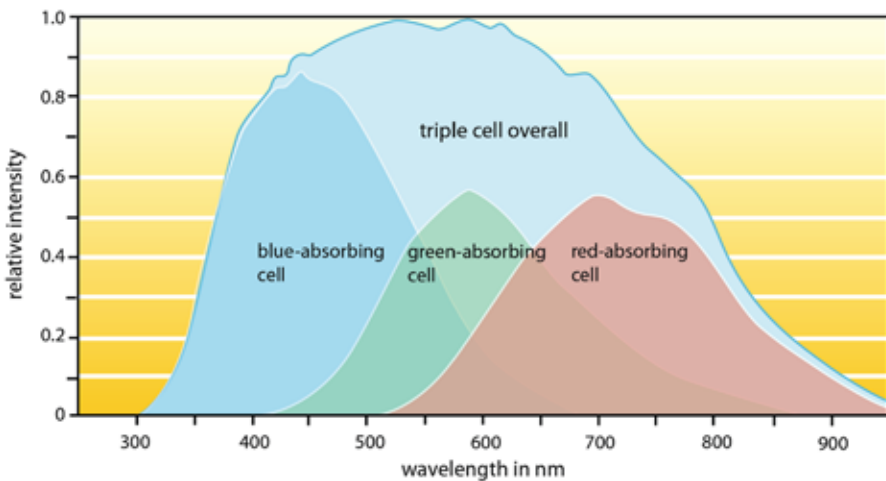


Figure 2. Light absorption effect of triple-junction technology


Each FlexLight® laminate utilizes the unique Triple-Junction thin-film silicon solar cells, where the blue, green and red light of the sun is absorbed in different layers of the cell. This technology results in better performance in low and diffuse light conditions. By-pass diodes are connected across each cell, allowing the modules to produce power even when partially shaded or soiled.



FlexLight® laminates provide better energy yield at high temperatures. Today, all solar products are rated based on standard test conditions. In real outdoor conditions, cell temperatures increase with increased solar irradiation, reaching levels much higher than standard test conditions. Crystalline silicon modules experience a significant decline in kWh output at high temperature, while FlexLight® laminates do not. As a result, FlexLight® laminates produce more energy when you need it most.


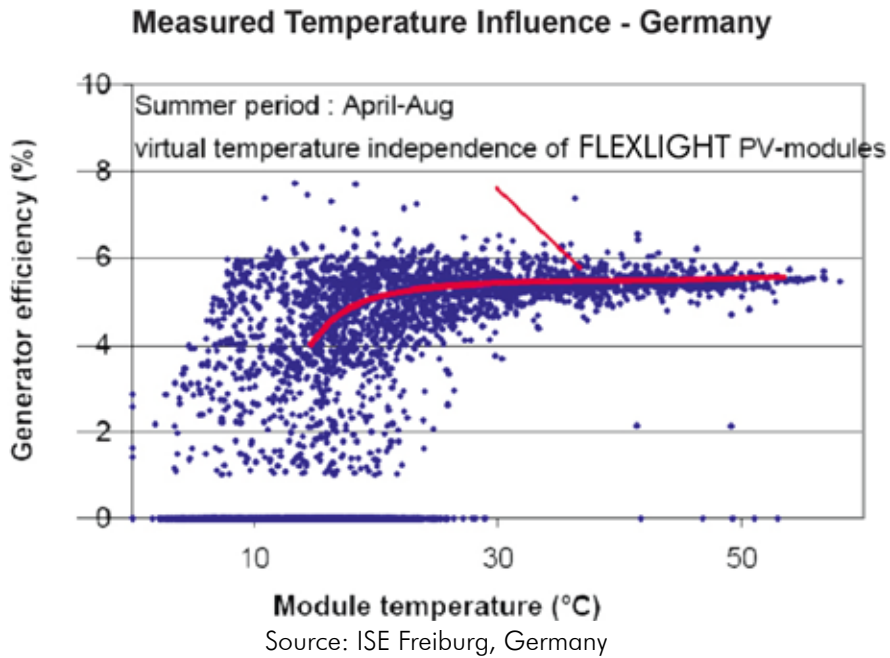


Yield in function of module temperature, Urbino, Central Italy (2003-2004)

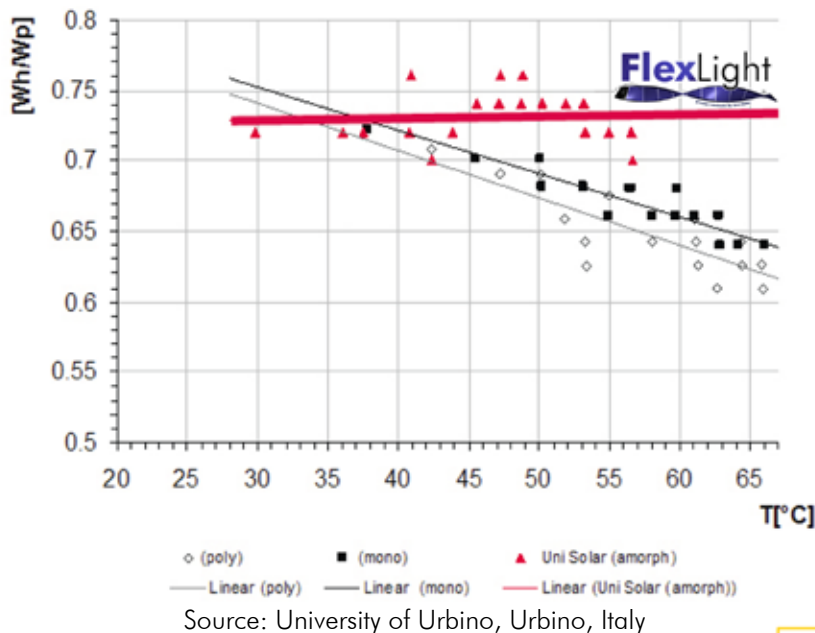

In many locations worldwide, independent third party businesses and institutions collect data on several different photovoltaic systems. This real world data demonstrates the superior energy production of FlexLight® laminates in high temperatures, low light levels, and shading. Below are three examples of this data from locations in Tucson, Arizona, USA; Frankenberg, Bolzano, Northern Italy; and Santa Cruz, California, USA. In each location, FlexLight® out-performs competitive products by producing more kilowatt-hours of energy per kilowatt installed.

Site: Tucson, Arizona, USA
 Source: Tucson Electric Power, Arizona, USA

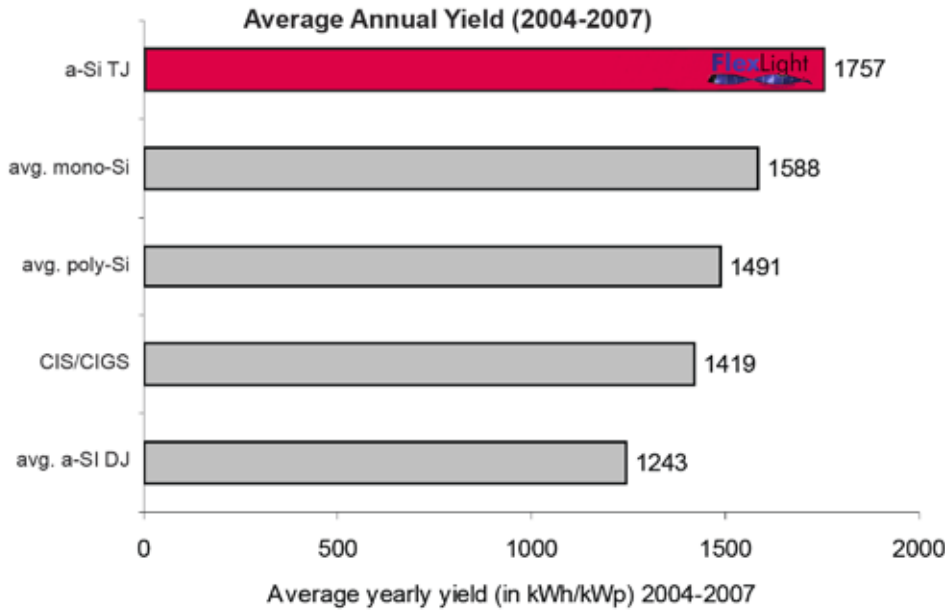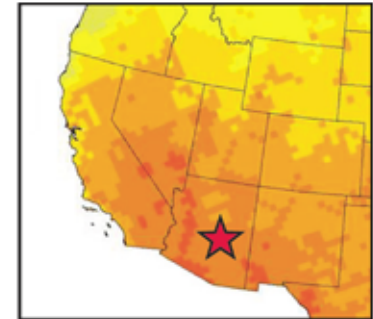


FLEXLIGHT Surplus versus:
 Avg. mono-Si: +11%
 Avg. poly-Si: +18%
 CIS/CIGS: +24%
 Avg. a-Si: +41%

Site: Frankenberg, Bolzano, Northern Italy
 Source: Office for Energy Saving, Province of Bolzano, Italy





FLEXLIGHT Surplus versus:
 Avg. poly-Si: +10%
 mono-Si: +29%

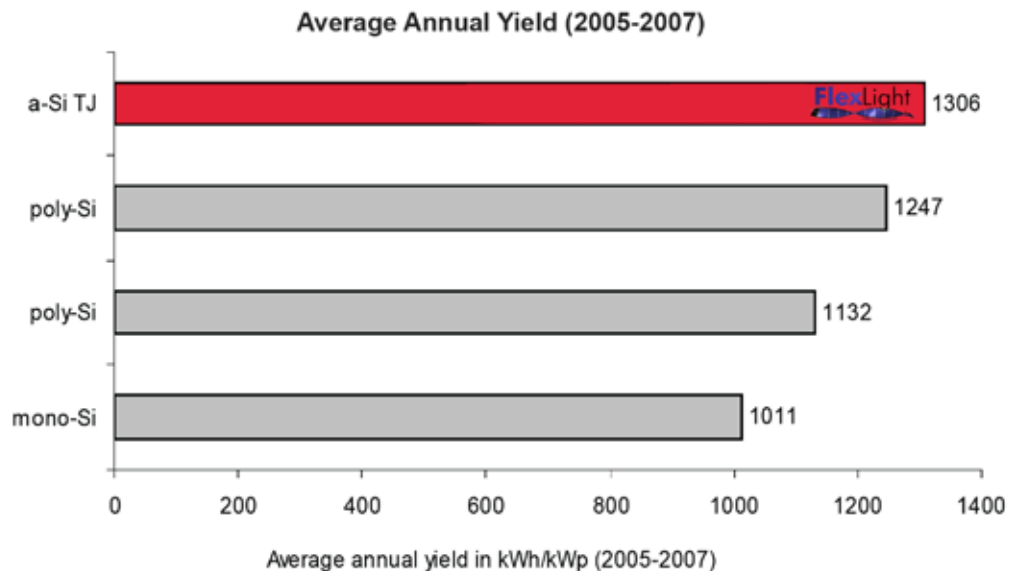


FLEXLIGHT

Site: Santa Cruz, California, USA
Source: Solarquest Report

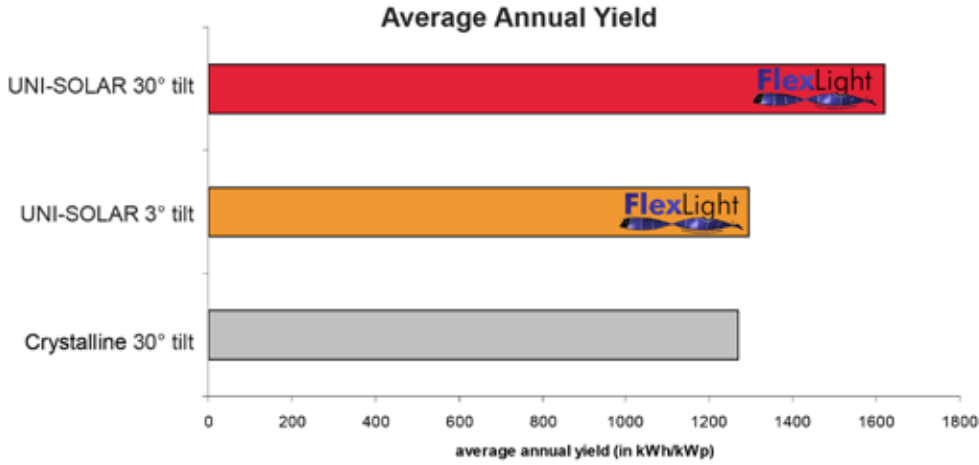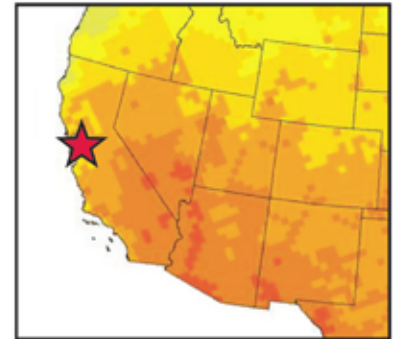


FlexLight® 30° Tilt Surplus versus FlexLight® 3° Tilt +25%
Crystalline 30° Tilt: 28%

**Santa Cruz Test Site
Energy Production Performance Summary**

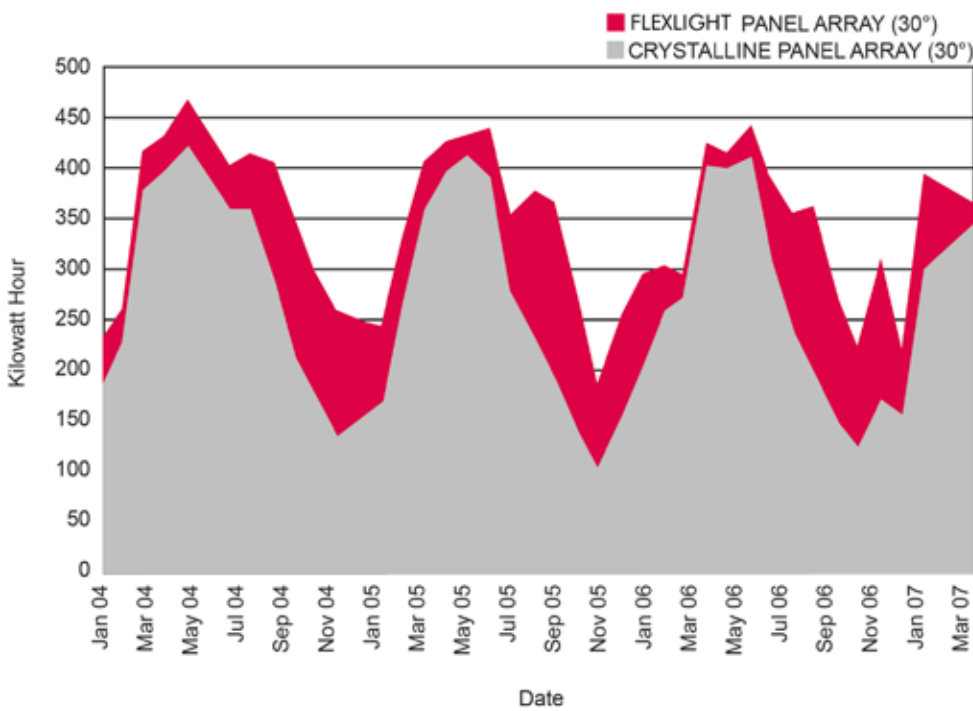

**Cumulative Power Production
November 2003 - March 2007**

FLEXLIGHT Surplus versus Crystalline: +24%

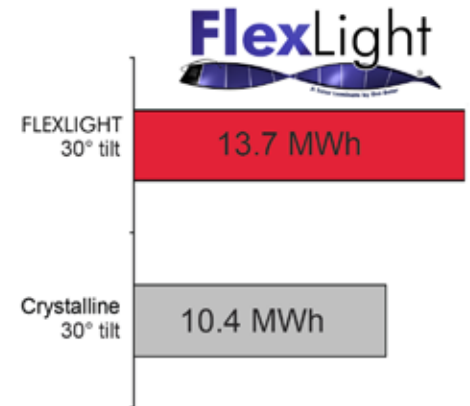

FLEXLIGHT



ADVANCED GREEN TECHNOLOGIES

www.AGT.com

954.735.2641 888.735.2641